

STRAINER

1 CHARACTERISTICS AND BENEFITS

- Flanged armature for cleaning neutral gaseous and liquid media
- Strainers protects valves, improves the system's reliability and lowers the costs of maintenance
- Ensured suitability for potable water and food-processing industry
- Simple, reliable construction and low weight
- High mesh width light – low chance of clogging
- Simple dismantling of the screen for cleaning
- Cleaning cover plug ½"
- Small loss of pressure due to optimum hydraulic form
- Max. flow speed for liquids 4 m/s, 5m/s at PN25, for gases 35 m/s
- Seals are made of BA-U material certified for potable water
- Constructions with a normal screen and a fine screen widen the range of application
- Simple handling and maintenance
- Inside and outside Epoxy powder coating in RAL 5005

2 STANDARDS


- Body and cover material acc. to EN 1561 for EN GJL-250 and EN 1563 for EN GJS-400-18
- Strength calculated acc. to EN 12516-3 and EN 12516-4
- Flanges acc. to EN 1092-2 PN 10/16/25
- Installation length acc. to EN 558-1, series 1 (DIN 3202, F1)
- EN 19 Specification
- Final strength and tightness test acc. to EN 12266-1
- Corrosion protection acc. to DIN 30677-2 and EN 14901
- Sealing elements for drinking water acc. to EN 681
- Microbiological suitability acc. to EN 16421 (W270)

3 APPROVALS

- UBA, W270, ACS WRAS, Belgaqua for EPDM sealing elements and Epoxy coating
- GSK – RAL GZ 662 for corrosion protection
- EAC for the Russian market
- EMI for the Hungarian market
- VIK for the Croatian market
- compliance with requirements of Ukrainian and Lithuanian market
- Suitability for drinking water in accordance with DM 174 for Italian market

ART. 020 PW

DN 15–300
PN 10/16 – cast iron
PN 16/25 – ductile iron

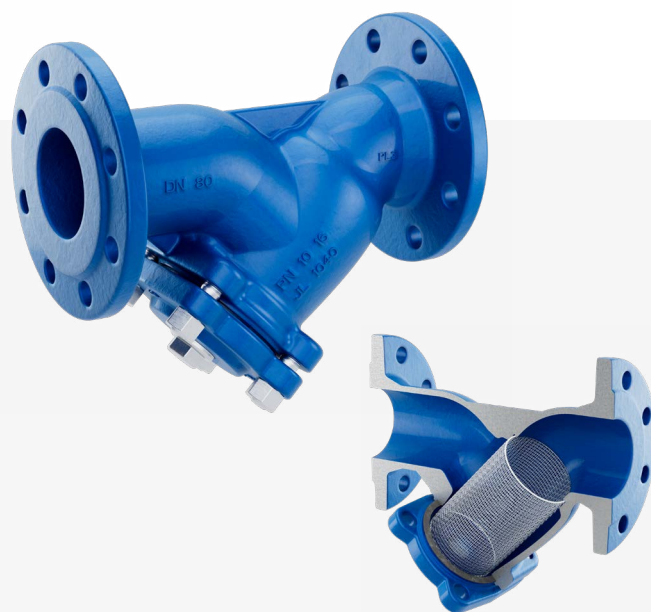

ON DEMAND

POSSIBLE ADDITIONS


- Without cover plug
- PN 6 / ANSI 150 flanges
- Screen of other densities
- Passivation
- Magnet inserts
- Ball valve taps
- Manometer connections

SPARE PARTS

- Gaskets
- Screens
- Cover

PN	10	16	16	25
Casting material	EN-GJL-250		EN-GJS-400-18	
Max. operating pressure [bar]	10	16	16	25
Max. operating temperature for neutral liquids [°C]	+0–50		+0–50	
Shell strength and tightness: test with air DN15–200, test with water DN250–300; rate A [bar]	15	24	24	37,5

TECHNICAL DRAWINGS

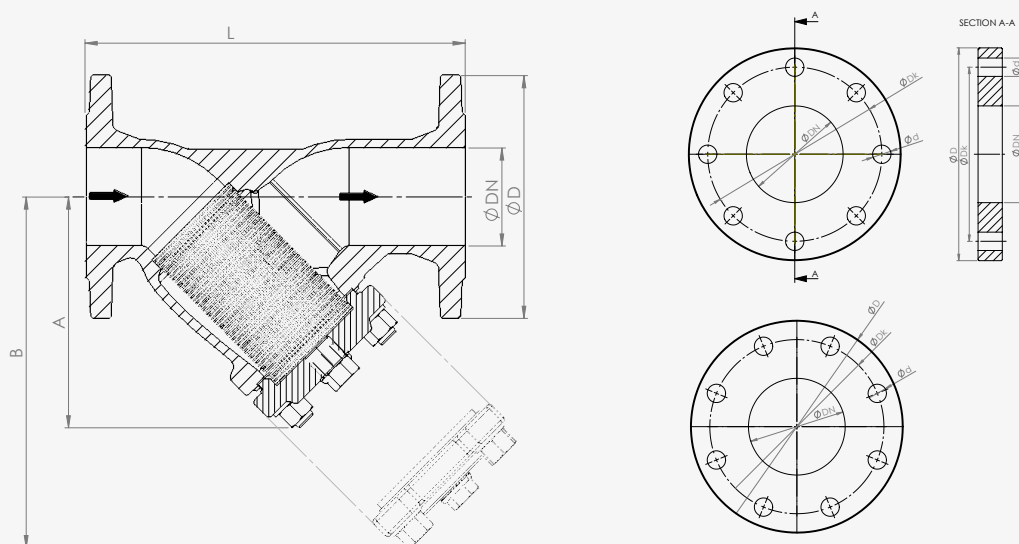

DATA

DN/R [°]		15	20	25	32	40	50	65	80	100	125	150	200	250	300
L [mm]		130	150	160	180	200	230	290	310	350	400	480	600	730	850
A [mm]		75	75	90	90	110	140	160	190	240	275	310	440	470	560
B [mm]		115	115	135	135	170	210	240	320	360	425	485	660	680	820
Dk PN16 [mm]		65	73	85	100	110	125	145	160	180	210	240	295	355	410
Dk PN25 [mm]		65	75	85	100	110	125	145	160	190	220	250	310	370	430
d PN16 [mm]		14			19						23			28	
d PN25 [mm]		14			19					23	28			31	
Recommended screen	Mesh light [MW]	2,0													
	Qty loops/cm²	15,5													
	Kv [m³/h]	39,4					63	110,5	170,3	245,7	416	608,4	999,7	1440,4	1976
	ζ [-]	2,64					2,52	2,34	2,26	2,65	2,26	2,19	2,56	3,01	3,32
Normal screen	Mesh light [MW]	0,54		0,87					1,18						
	Qty loops/cm²	150	150	64	64	64	64	64	25	25	25	25	25	25	25
	Kv [m³/h]	5,3	9,5	16,5	20	33	54	95	140	201	340	526	870	1260	1735
	ζ [-]	2,88	2,84	2,3	4,19	3,76	3,43	3,16	3,34	3,96	3,38	2,93	3,38	3,94	4,31
Fine screen	Mesh light [MW]	0,25													
	Qty loops/cm²	625	625	625	625	625	625	625	625	625	625	625	625	625	625
	Kv [m³/h]	5	9	14,8	18	30	48	85	131	189	320	494	818	1184	1631
	ζ [-]	3,24	3,16	2,85	5,18	4,55	4,34	3,95	3,82	4,48	3,81	3,32	3,83	4,46	4,87
Weight [kg]*		2,2	3,3	3,8	5	6,8	7,5	11,2	15,4	23,2	33,5	47,1	99,5	162	280

* Weight only for cast iron strainers.

MATERIALS

	BASIC VERSION		SPECIAL VERSIONS ON DEMAND (differences from basic version)
	CAST IRON	DUCTILE IRON	
Body	EN GJL-250	EN GJS-400-18	
Cover	EN GJL-250	EN GJS-400-18	
Cover gasket	BA-U	BA-U	
Cover screws	A2	A2	A4
Čep ½"	A2	A2	A4
Screen	1.4301 expanded	1.4301 expanded	1.4401/passivated
Screen carrier	1.4301 expanded	1.4301 expanded	1.4401/perforated 10x10 mm
Epoxy powder coating	RAL5005 min. 250 µm	RAL5005 min. 250 µm	RAL9006 (up to 300°C)/RAL5005 epoxy wet (up to 150°C)